

KLOZURE® DYNAMIC SEALS

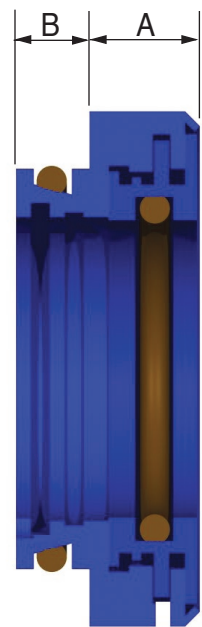
ISO-GARD® Bearing Isolator**Popular Pump Sizes and O-Ring Numbers**

Additional sizes and numbers available—consult distributor or KLOZURE.

Pump Number	Seal Location	Dimensions (Inches)		ISO-GARD® Prod. Code	O-Ring No.	
		Shaft Ø x Bore Ø x Wid.			I.D.	O.D.
Goulds 3171M	Outboard	1.375 x 3.625 x 0.750		29502-4730	AS-127	AS-152
Goulds 3171S	Outboard	0.875 x 2.750 x 0.750		29502-4731	AS-118	AS-145
Goulds 3175L	Inboard	4.313 x 5.500 x 0.750		29502-4115	AS-157	AS-160
	Outboard	4.125 x 5.250 x 0.750		29502-4116	AS-156	AS-159
Goulds 3175M	Inboard	3.312 x 4.125 x 0.750		29502-4113	AS-153	AS-154
	Outboard	3.125 x 4.125 x 0.750		29502-4114	AS-152	AS-154
Goulds 3175S	Inboard	2.500 x 3.250 x 0.750		29502-4111	AS-144	AS-151
	Outboard	2.375 x 3.250 x 0.750		29502-4112	AS-142	AS-151
Goulds 3175XL	Inboard	5.000 x 6.250 x 0.750		29502-4203	AS-160	AS-163
	Outboard	4.313 x 5.500 x 0.750		29502-4115	AS-157	AS-160
Goulds 3196ST, 3198 STX	Inboard	1.375 x 2.835 x 0.750		29502-4104	AS-126	AS-146
	Outboard	0.875 x 1.250 x 0.625		29507-4106	AS-118	AS-121
Goulds 3196M, MT, MTX	Inboard	1.750 x 2.875 x 0.750		29502-4107	AS-132	AS-146
	Outboard	1.125 x 2.000 x 0.750		29502-4108	AS-122	AS-133
Goulds 3196LTC	Inboard	2.125 x 2.875 x 0.750		29502-4109	AS-139	AS-146
	Outboard	1.875 x 2.750 x 0.750		29502-4110	AS-134	AS-144
Goulds 3196XLT	Inboard	2.500 x 3.250 x 0.750		29502-4111	AS-144	AS-151
	Outboard	2.375 x 3.250 x 0.750		29502-4112	AS-142	AS-151
Goulds 3198MTX	Inboard	1.750 x 2.875 x 0.750		29502-4107	AS-132	AS-146
	Outboard	1.125 x 2.000 x 0.750		29502-4108	AS-122	AS-133
Goulds 3316L	Inboard	1.937 x 3.000 x 0.750		29502-4120	AS-135	AS-149
	Outboard	2.062 x 3.000 x 0.750		29502-4119	AS-138	AS-149
Goulds 3316M	Inboard	1.437 x 2.437 x 0.750		29502-4177	AS-127	AS-140
	Outboard	1.375 x 2.125 x 0.750		29502-4118	AS-126	AS-135
Goulds 3405L	Inboard	1.937 x 3.000 x 0.750		29502-4120	AS-135	AS-149
	Outboard	2.062 x 3.000 x 0.750		29502-4119	AS-138	AS-149
Goulds 3405M	Inboard	1.437 x 2.437 x 0.750		29502-4177	AS-128	AS-140
	Outboard	1.375 x 2.125 x 0.750		29502-4118	AS-126	AS-134
Goulds 3405S	Inboard	1.062 x 1.643 x 0.625		29507-4206	AS-121	AS-127
	Outboard	0.937 x 1.500 x 0.625		29507-4122	AS-119	AS-125
Goulds 3700M	Inboard	2.186 x 3.186 x 0.750		29502-4279	AS-139	AS-151
	Outboard	2.280 x 3.280 x 0.750		29502-4338	AS-141	AS-151
Goulds 3796LTX, 3996LTX	Inboard	2.125 x 2.875 x 0.750		29502-4109	AS-139	AS-146
	Outboard	1.875 x 2.750 x 0.750		29502-4110	AS-134	AS-144
Goulds 3996MT	Inboard	1.750 x 3.937 x 0.750		29502-4348	AS-132	AS-154
	Outboard	1.125 x 2.000 x 0.750		29502-4108	AS-122	AS-133
Goulds 3996ST, STX	Inboard	1.375 x 2.835 x 0.750		29502-4104	AS-126	AS-146
	Outboard	0.875 x 1.250 x 0.625		29507-4106	AS-118	AS-121
Durco MkII Grp I	Inboard w/o	1.125 x 2.441 x 0.770		29599-0095	AS-122	AS-140
	Inboard w/b	1.125 x 2.000 x 0.750		29502-4108	AS-122	AS-133
	Outboard	0.875 x 1.625 x 0.625		29507-4123	AS-118	AS-127
Durco MkII Grp II, Durco MkIII Grp II	Inboard	1.875 x 2.625 x 0.750		29502-4124	AS-135	AS-142
	Outboard	1.125 x 2.000 x 0.750		29502-4108	AS-122	AS-133
Durco MkII Grp III, Durco MkIII Grp III	Inboard	2.625 x 3.677 x 0.750		29502-4125	AS-146	AS-153
	Outboard	2.625 x 3.677 x 0.750		29502-4125	AS-146	AS-153
Durco MkIII Grp I	Inboard	1.375 x 2.835 x 0.750		29502-4104	AS-126	AS-146
	Outboard	0.875 x 1.625 x 0.625		29507-4123	AS-118	AS-127
Durco MkIII Grp II (oversized shaft)	Inboard	1.875 x 2.625 x 0.750		29502-4124	AS-135	AS-142
	Outboard	1.500 x 2.000 x 0.625		29507-4130	AS-129	AS-133

ISO-GARD® 29502

- Flange length (A) = 0.375"
- Depth in housing (B) = 0.375"
- One O.D. O-ring required
- Fluoroelastomer O-rings standard

ISO-GARD® 29507

- Flange length (A) = 0.375"
- Depth in housing (B) = 0.250"
- One O.D. O-ring required
- Fluoroelastomer O-rings standard



www.klozure.com

G-6284 1/05 Rev. A

Klozure® Dynamic Seals
 A Division of Garlock Sealing Technologies®
 1666 Division Street
 Palmyra, New York 14522 USA
 1-866-KLOZURE (1-866-556-9873)
 Fax: 1-866-OILSEAL (1-866-645-7325)

Bring KLOZURE to all your sealing requirements

