

Garlock® Style 8420™ Split Expansion Joint


Easy installation and removal reduce downtime with new split expansion joint

- Split design eliminates equipment disassembly, reducing costly downtime
- Available in EPDM, nitrile* and fluoroelastomer in sizes from 2" to 24"
- Can be customized for your application; contact Garlock with your specifications
- Adhesive kits with comprehensive installation instructions are provided with every shipment to facilitate quick assembly

Ideal for

- All types of vacuum pumps
- Non-flanged piping
- Small, irregular openings
- Low-pressure and vacuum applications

* EPDM and nitrile are standard—
other elastomers available on request.

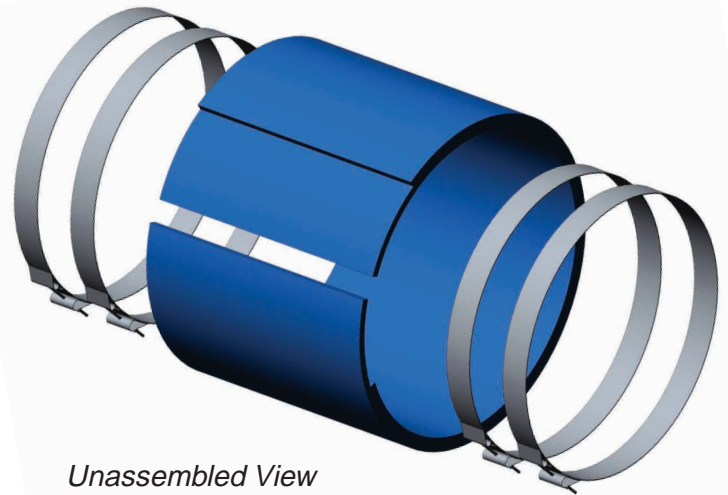

Garlock
SEALING TECHNOLOGIES®

Specifications

	2" Max. Pipe Gap Opening	4" Max. Pipe Gap Opening	6" Max. Pipe Gap Opening
Clamps Required:	4	4	4
Thickness:			
2"-12" Size (50.8 mm-304.8 mm)	1/4" (6.4 mm)	1/4" (6.4 mm)	1/4" (6.4 mm)
14"-24" Size (355.6 mm-609.6 mm)	3/8" (9.5 mm)	3/8" (9.5 mm)	3/8" (9.5 mm)
Pressure, Max.:	15 psi (1.034 bar)	5 psi (0.345 bar)	5 psi (0.345 bar)
Vacuum:	14" Hg (356 mm Hg)	5" Hg (127 mm Hg)	5" Hg (127 mm Hg)
Temperature, Max.:	400°F (204°C)	400°F (204°C)	400°F (204°C)
Movement:	Vibration Only	Vibration Only	Vibration Only
Lateral Misalignment, Max.:	1/2" (12.7 mm)	1/2" (12.7 mm)	1/2" (12.7 mm)
Width of Joint:	8" (203.2 mm)	8" (203.2 mm)	10" (254 mm)



Notes:

1. All applications above 165°F (74°C) require Viton* adhesive kits.
2. T-bolt clamps recommended on all applications; not included with adhesive kits.

* Viton is a registered trademark of DuPont Dow Elastomers.

AUTHORIZED DISTRIBUTOR



ISO 9001:2000
Cert. #001762

WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

GARLOCK is a registered trademark for packings, seals, gaskets, and other products of Garlock.

© Garlock Inc 2004. All rights reserved worldwide.



www.garlock.net
Garlock Sealing Technologies
 1666 Division Street
 Palmyra, New York 14522 USA
 1-315-597-4811
 1-800-448-6688
 Fax: 1-800-543-0598
 1-315-597-3216

Other Garlock facilities are located in:

Columbia, SC, USA
 Phone 1-803-783-1880
 Fax 1-803-783-4279

Houston, TX, USA
 Phone 1-281-459-7200
 Fax 1-281-458-0502

Sydney, Australia
 Phone 61-2-9793-2511
 Fax 61-2-9793-2544

São Paulo, Brazil
 Phone 55-11-4352-6161
 Fax 55-11-4352-8181

Brantford, Canada
 Phone 1-519-753-8671
 Fax 1-519-758-2265

Sherbrooke, Canada
 Phone 1-819-563-8080
 Fax 1-819-563-5620

W. Yorkshire, England
 Phone 44-1422-313600
 Fax 44-1422-313601

Saint-Étienne, France
 Phone 33-4-7743-5100
 Fax 33-4-7743-5151

Neuss, Germany
 Phone 49-2131-3490
 Fax 49-2131-349-222

Mexico City, Mexico
 Phone 52-555-567-7011
 Fax 52-555-368-0418

Singapore
 Phone 65-6285-9322
 Fax 65-6284-5843

Dubai, UAE
 Phone 971-4-8833652
 Fax 971-4-8833682

Garlock Sealing Technologies® is an EnPro Industries company.