

Heat Shield Gasket

The flexible graphite filled spiral wound gasket is widely used throughout chemical plants and refineries. Exceptional sealability and fire safety of this gasket make it superior to other types of spiral wound gaskets. However, the graphite has limitations, especially when exposed to strong oxidizing agents and temperatures above 950°F.

Specifications*

Temperature, max.	1250°F (677°C)
Flange Class	150# to 600#
Pipe diameters	2" to 24"; specials available



Value & Benefits

- Available in the EDGE® gasket in diameters of 2" and above
- Best seal for the lowest bolt loads
- Relief tab design provides solid seating of the flange to the gasket centering ring face
- Reduces bolt load caused by thermal cycling
- Eliminates radial buckling
- Prevents catastrophic failure and potential damage to downstream equipment due to wire unraveling

Ideal for

- Oxidizing environments
- Power plant steam drums
- Hydrocarbon processing catcrackers
- Chemical plant Oleflex units and ammonium nitrate service
- Hydrogen units, exhaust manifolds, and more...

Garlock
SEALING TECHNOLOGIES®


an EnPro Industries company

Specifications

Temperature, max.: 1250°F (677°C)
 Flange class: 150# to 600#
 Pipe diameters: 2" to 24"; specials available

Construction

- Heat-resistant graphite filler
- Heat- and oxidation-resistant pure mica filler
- Spiral-wound wires of a choice of commercially available metals
- Rings of any standard metal, including INCONEL* X750

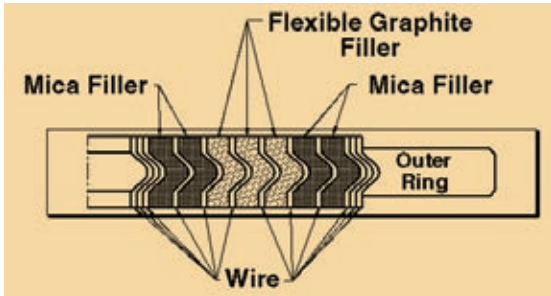

A CONTROLLED DENSITY™ Gasket

Gasket Style & Material	Gasket M factor	Gasket Y Factor
Traditional spiral wound gasket 304 SS and flexible graphite	3.00	10,000
Garlock CONTROLLED DENSITY spiral wound gasket	3.00	7,500

* INCONEL is a registered trademark of Inco Alloys International, Inc.

New Heat Shield EDGE®: A Real Upgrade for Your System

- Available in the EDGE® gasket in diameters of 2" and above
- Best seal for the lowest bolt loads
- Relief tab design provides solid seating of the flange to the gasket centering ring face
- Reduces bolt load loss caused by thermal cycling
- Eliminates radial buckling
- Prevents catastrophic failure and potential damage to downstream equipment due to wire unraveling

Ask your local Authorized Garlock Distributor to order the Heat Shield EDGE® gasket for you today.

NOTE:

References made to particular applications are not a guarantee of acceptability of use for these services. Contact Garlock for additional details and to discuss your particular application.



AUTHORIZED REPRESENTATIVE



an EnPro Industries company

Garlock Sealing Technologies
 1666 Division Street
 Palmyra, New York 14522 USA
 1-315-597-4811
 1-800-448-6688
 Fax: 1-800-543-0598
 1-315-597-3039

www.garlock.com

WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

GARLOCK is a registered trademark for packings, seals, gaskets, and other products of Garlock.

© Garlock Inc 2007. All rights reserved worldwide.

Other Garlock facilities are located in:

Columbia, SC, USA
 Phone 1.803.783.1880
 Fax 1.803.783.4279

Houston, TX, USA
 Phone 1.281.459.7200
 Fax 1.281.458.0502

Sydney, Australia
 Phone 61.2.9793.2511
 Fax 61.2.9793.2544

São Paulo, Brazil
 Phone 55.11.4352.6161
 Fax 55.11.4352.8181

Sherbrooke, Canada
 Phone 1.819.563.8080
 Fax 1.819-563.5620

W. Yorkshire, England
 Phone 44.1422.313600
 Fax 44.1422.313601

Saint-Étienne, France
 Phone 33.4.7743.5100
 Fax 33.4.7743.5151

Neuss, Germany
 Phone 49.2131.3490
 Fax 49.2131.349.222

Mexico City, Mexico
 Phone 52.555.567.7011
 Fax 52.555.368.0418

Singapore
 Phone 65.6285.9322
 Fax 65.6284.5843

Shanghai, China
 Phone 86.021.62789702
 Fax 86.021.62787826

Dubai, UAE
 Phone 971.4.8833652
 Fax 971.4.8833682