

Circpac MD

A segmented circumferential seal designed for fans, blowers, dryers, turbines, centrifuges and other rotating equipment comes packaged in a convenient split housing for easy installation. Standard designs consistently outperform packing, bushings, labyrinths, and felt seals with lower gas consumption over a wider range of operating conditions.

Features/Benefits


 Floating circumferential rings are engineered for long-term, reliable performance - Hydraulically balanced rings with hydrodynamic surface features extend the maximum pressure, temperature, and speed limits beyond conventional circumferential seal designs.

 Radially split seal housing is installed without dismantling the equipment - With no equipment modifications, seal mounts outside the seal chamber to simplify installation and reduce downtime.

Robust carbon rings are durable for split installation handling and upset conditions

 Designed with foul resistant joints and large bearing pads, carbon rings assemble easily and maintain integrity during off-design operation.

- Large housing clearance accommodates equipment thermal growth and shaft misalignment - Standard radial clearances up to 0.25" (6 mm) satisfy various equipment types.
- Multiple ring configurations provide an economical solution to various application requirements - Rings can be staged for reduced leakage, pressurized for zero process emissions, or extra rings added for emergency backup.
- Materials of construction are selected for application compatibility - Various material grades are available to meet temperature and corrosion resistance requirements.
- Lower gas consumption allows simplified gas control system - Circpac MD cost of operation is lower than typical circumferential or labyrinth seals.

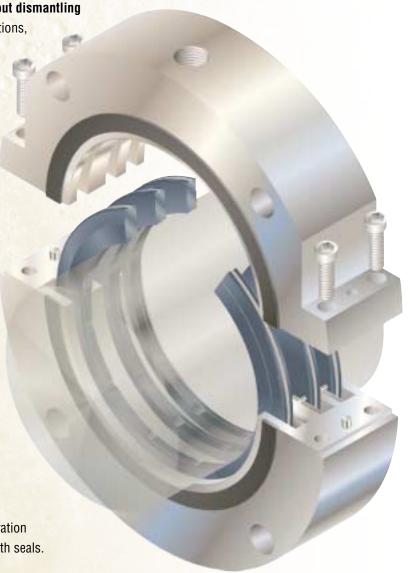



Operating Parameters

· Pressure: vacuum to 100 psi (6.9 bar)

• Temperature: up to 1100°F (593°C) · Speed: up to 150 fps (45.7 m/s)

1.375" to 18.000" (35 to 457 mm) Sizes:

Contact Flowserve for extended conditions, alternate materials, or custom configurations.

Flowserve's Circpac HP is available for higher pressure and speed requirements. 0.5" NPT barrier inlet G1 G2 "F" studs n Ε Single **Double** Triple B Shaft Seal

Materials of Construction

• Ring: Carbon Graphite

• Housing: AISI 316, AISI 410, Alloy 600

• Springs: Alloy 600, Alloy X-750

· Gaskets: Elastomer, Fiber, Graphite

An optional Gas Barrier Control Panel



is available for the Circpac MD. This self-contained, compact, easy-touse unit includes all controls necessary for simple, efficient

seal operation. It also eliminates the time, expense and hassle of installing each component separately.

Dimensional Data (inches)

Shaft &	_		_	_	_	_			
Seal Size	Α	В	C	D	E	F	G1	G2	G3
1.375	2.50	1.48	0.050	3.750	4.88	0.375	1.03	1.84	2.39
1.500	2.50	1.60	0.050	3.750	4.88	0.375	1.03	1.84	2.39
2.000	2.75	2.10	0.050	4.250	5.63	0.500	1.03	1.88	2.45
3.000	3.87	3.22	0.110	5.625	7.01	0.500	1.03	1.88	2.45
4.000	5.00	4.25	0.125	6.750	8.13	0.500	1.19	1.94	2.54
5.000	6.12	5.38	0.190	8.250	9.63	0.500	1.19	1.94	2.54
6.000	7.12	6.38	0.190	9.375	11.01	0.625	1.19	2.00	2.63
7.000	8.25	7.50	0.250	10.750	12.38	0.625	1.34	2.12	2.63
8.000	9.25	8.50	0.250	11.750	13.38	0.625	1.34	2.12	2.72
9.000	10.25	9.50	0.250	12.875	14.51	0.625	1.34	2.12	2.72
10.000	11.25	10.50	0.250	13.875	15.51	0.625	1.34	2.12	2.81
11.000	12.25	11.50	0.250	15.000	16.88	0.750	1.51	2.50	2.81
12.000	13.25	12.50	0.250	16.000	17.88	0.750	1.51	2.50	2.90
13.000	14.25	13.50	0.250	17.125	19.01	0.750	1.51	2.50	2.90
14.000	15.25	14.50	0.250	18.125	20.01	0.750	1.51	2.50	2.99
15.000	16.25	15.50	0.250	19.250	21.38	0.875	1.51	2.50	2.99
16.000	17.25	16.50	0.250	20.250	22.38	0.875	1.51	2.50	2.99
17.000	18.25	17.50	0.250	21.250	23.38	0.875	1.51	2.50	2.99
18.000	19.25	18.50	0.250	22.250	24.38	0.875	1.51	2.50	2.99

Dimensional Data (millimeters)

Difficiational Data (minimotors)										
Shaft & Seal Size	A	В	C	D	Ε	F	G1	G2	G3	
35	63.5	37.5	1.27	100	130	10	26.1	46.7	60.7	
40	63.5	42.5	1.27	100	130	10	26.1	46.7	60.7	
50	69.0	52.5	1.27	110	150	13	26.1	47.8	62.2	
80	102.0	85.6	2.79	150	185	13	26.1	47.8	62.2	
100	125.0	106.4	3.18	180	210	13	30.2	49.3	64.5	
130	160.0	139.7	4.83	210	250	13	30.2	49.3	64.5	
150	180.0	159.7	4.83	240	285	16	30.2	50.8	66.8	
180	212.0	192.7	6.35	280	320	16	34.1	53.8	66.8	
200	232.0	212.7	6.35	300	345	16	34.1	53.8	69.1	
230	262.0	242.7	6.35	330	375	16	34.1	53.8	69.1	
250	282.0	262.7	6.35	360	400	16	34.1	53.8	71.4	
280	312.0	292.7	6.35	380	435	19	38.2	63.5	71.4	
300	332.0	312.7	6.35	410	460	19	38.2	63.5	73.7	
330	362.0	342.7	6.35	440	490	19	38.2	63.5	73.7	
350	382.0	362.7	6.35	460	515	19	38.2	63.5	75.9	
380	412.0	392.7	6.35	490	550	22	38.2	63.5	75.9	
400	432.0	412.7	6.35	520	575	22	38.2	63.5	75.9	
430	462.0	442.7	6.35	540	600	22	38.2	63.5	75.9	
450	482.0	462.7	6.35	570	625	22	38.2	63.5	75.9	

Other sizes available upon request.

The information and specifications presented in this product brochure are believed to be accurate, but are supplied for information purposes only and should not be considered certified or as a quarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, with respect to the product. Although Flowserve Corporation can provide general application guidelines, it cannot provide specific information for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper selection, installation, operation and maintenance of Flowserve products. Because Flowserve Corporation is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice.

Primary Worldwide Flow Solutions Division Locations United States

Edmonton, Alberta Kalamazoo, MI Phone 269-381-2650 Phone 780-463-7958 Fax 269-382-8726 Fax 780-450-1241

Mexico

Scarborough, Ontario Phone 416-292-2877 Fax 416-292-5190

Roosendaal Phone 31-165-581400 Fax 31-165-552622

Japan

Netherlands

Villa Martelli Phone 54-11-4709-6800 Fax 54-11-4709-7072

Argentina

Marayong NSW Phone 61-2-8822-7100 Fax 61-2-9679-7511

Australia

Licensees, authorized agents, and affiliated companies located worldwide.

Singapore Phone 65-6-8465100

Fax 65-6-747-1963

Tlaxcala Phone 52-2-461-6791 Fax 52-2-461-6847

Phone 55-11-4066-8600 Fax 55-11-4066-7014

Brazil

Osaka Phone 81-720-85-5571 Fax 81-720-85-5575

Germany Phone 49-231-6964-0 Fax 49-231-6964-248

www flowserve com

ISO 9000 ORIG 8/02 USA Certified Printed in USA