


Thomson MULTIPAC™ 6700

Aramid Fibers / EPDM Binder

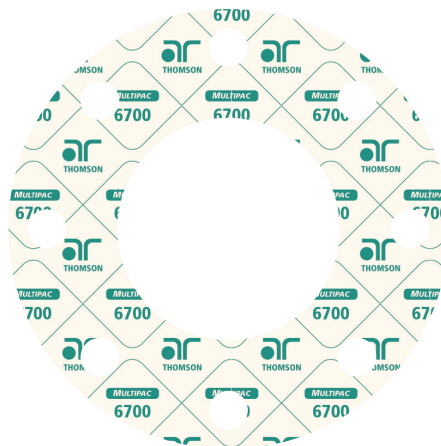

FEATURES / BENEFITS

- Premium compressed sheet with good tensile strength for applications where an EPDM binder is specified.
- Good flexibility/cut-ability.
- Excellent resistance to ozone, weathering and aging.

TYPICAL APPLICATIONS

- Pulp and Paper, Chemical, Mining and Municipal.
- Hot water, brake fluid, saturated steam, dilute caustics, ozone, ketones and phosphate esters.

SPECIFICATIONS

Construction: Aramid Fibers / EPDM Binder

Temperatures:

Minimum: -100°F (-73°C)

Intermittent: +700°F (+371°C)

Continuous: +400°F (+205°C)

Pressure, max: 1450 psi (100 bar)

Tensile Strength: 2000 psi

Color: Off-White with Emerald branding.

See reverse for more technical data.

TECHNICAL DATA - MULTIPAC™ 6700

Physical Properties ¹		
TEST METHOD	TYPICAL PHYSICAL PROPERTIES	
ASTM F36	Compressibility: range, %	7–17
ASTM F36	Recovery: %	50
ASTM F38	Creep relaxation: %	25
ASTM F152	Tensile across grain: psi	2000
ASTM F433	Density: lbs/ft ³ (grams/cm ³)	75 (1.2)
ASTM F586	Design factors:	1/16"
	"m" factor	2.75
	"y" factor, psi	3700

Immersion Properties* - ASTM F146 Fluid Resistance After Five Hours		
	ASTM IRM #903 300°F (150°C)	ASTM FUEL B 70–85°F (20–30°C)
Thickness increase: %	15–30	5–20
Weight increase: %	-	15

Sealing Characteristics	
	ASTM F37 FUEL A
Leakage: ml/hr	.05

NOTES

This is a general guide and should not be the sole means of selecting or rejecting this material. Based on ANSI RF flanges at our preferred torque - when approaching maximum pressure, continuous operating temperature, minimum temperature or 50% of maximum P_{xT}, consult A.R. Thomson Group. Minimum temperature rating is conservative.

* Values do not constitute specification limits.

¹ All data is based on 1/16" sheet except F38 which is based on 1/32" sheet thickness. For data on other sizes, please consult A.R. Thomson Group.

AUTHORIZED DISTRIBUTOR

Limitation of liability: actual performance may vary and is determined by factors unique to a given application. It is recommended that care be taken in the selection and application of materials for hazardous services and controlled testing be undertaken to determine suitability for a specific application. A.R. Thomson Group does not make or imply any warranty of suitability for a particular purpose and is not liable for any damages arising from the use of the information in this sheet.



Locations across Canada to serve you. For your nearest branch, please visit www.arthomson.com

Copyright © A.R. Thomson Group - All rights reserved. v1.3