


THE EDGE™ METALLIC GASKET

Anti-Buckling Spiral Wound Technology

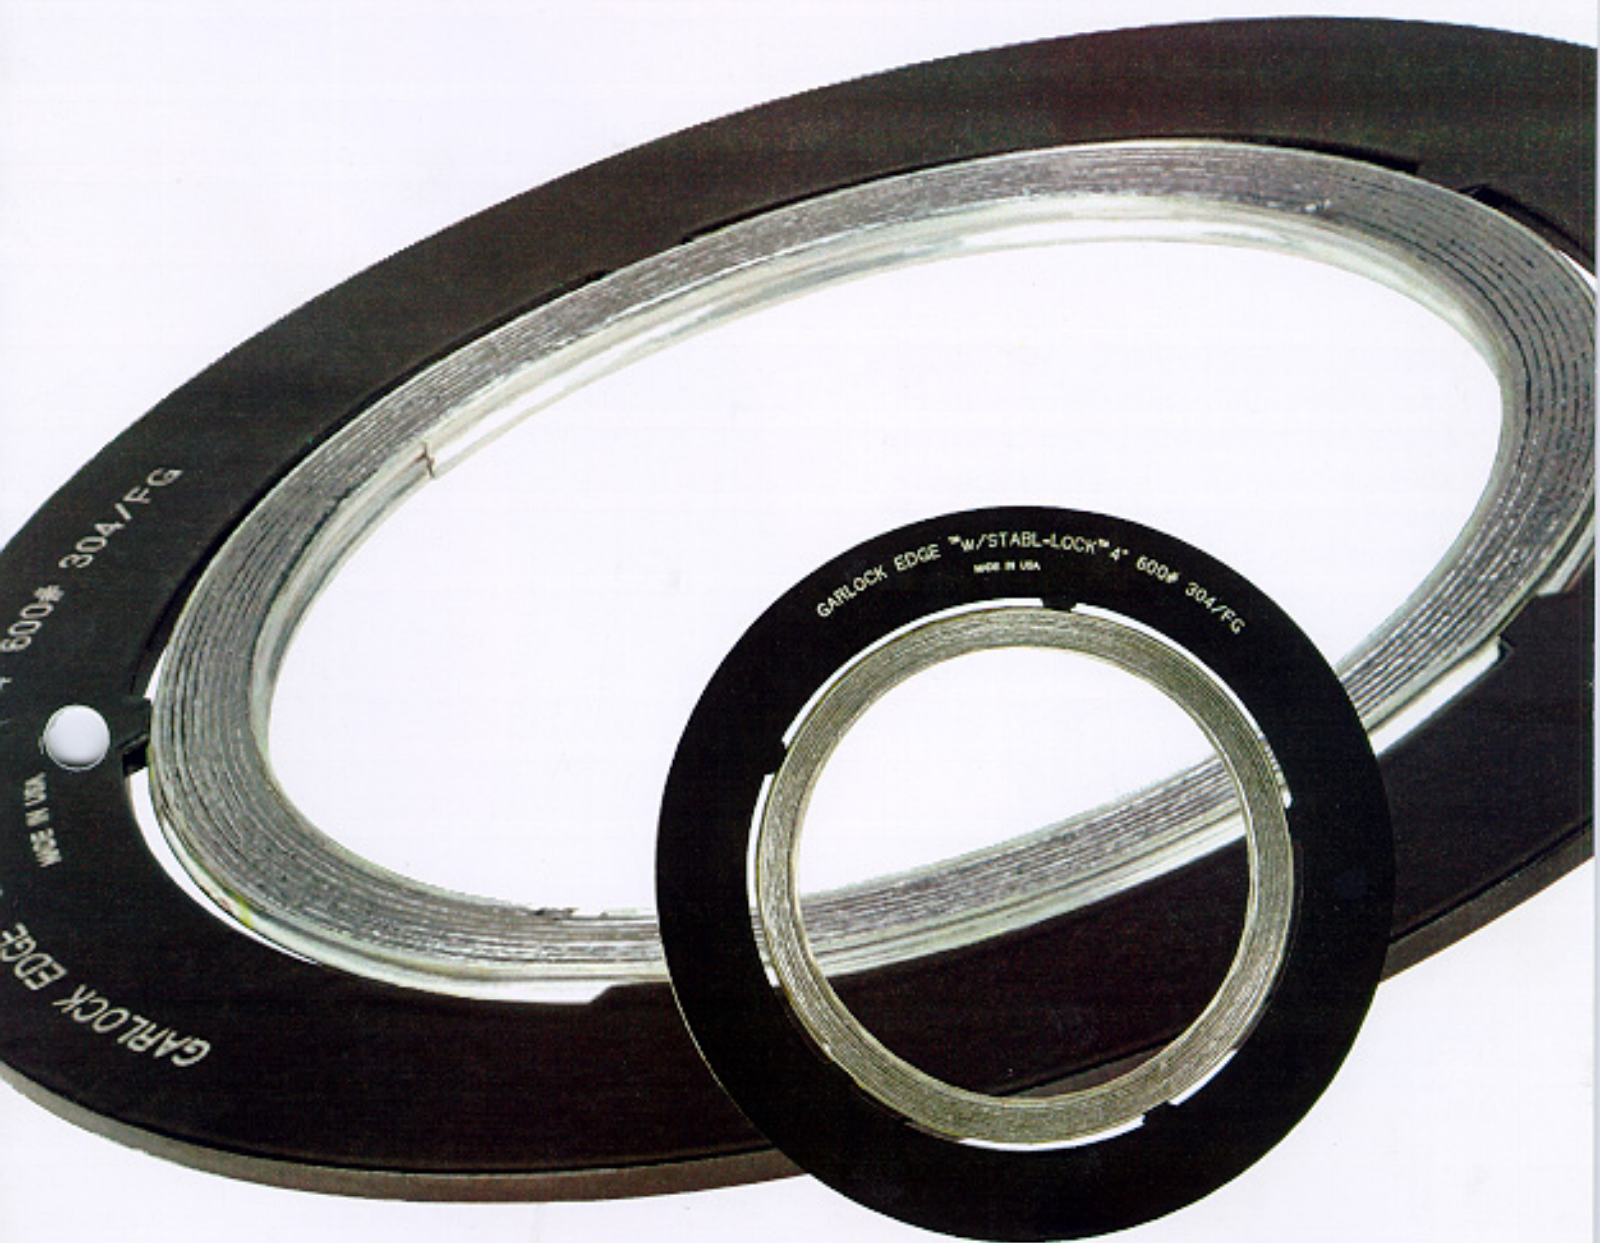

Garlock

SEALING TECHNOLOGIES


The EDGE™* eliminates Radial Buckling

Radial buckling occurs when the ID of a spiral wound gasket protrudes into the process stream. The winding material can be carried downstream clogging pumps, valves, and other equipment. This can also create a loss of torque on a bolted flange assembly, causing leakage or unscheduled maintenance.

Radial buckling is a result of many variables, such as compressive stress, flange seating surface, and gasket construction. It has been known to occur with both flexible graphite and PTFE fillers for almost all pressure class gaskets.

Despite industry research, only minimal improvements have been accomplished. The ASME recently mandated the use of expensive inner rings to prevent radial buckling. This has been your only option...until the Garlock EDGE™.

Zero Buckling

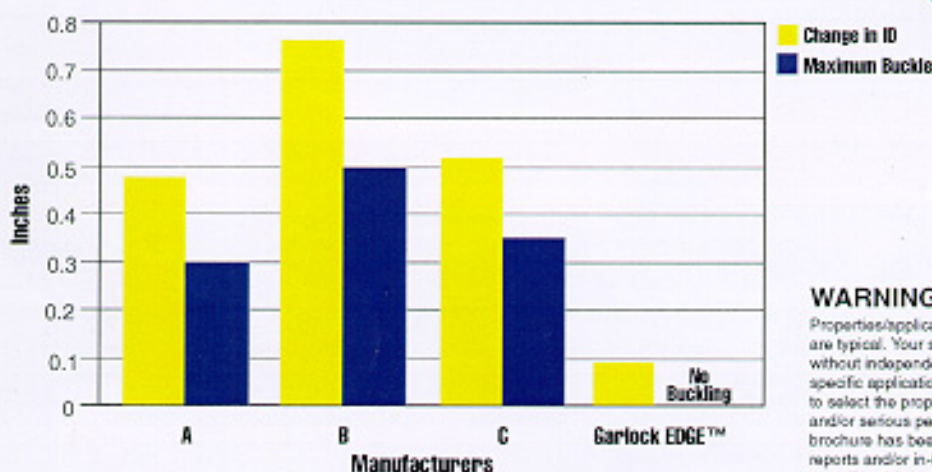


All gaskets were 8" NPS, 600 pound 304/FG windings with outer rings. The gaskets were subjected to 26,296 PSI gasket stress.

WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury. Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing. While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.



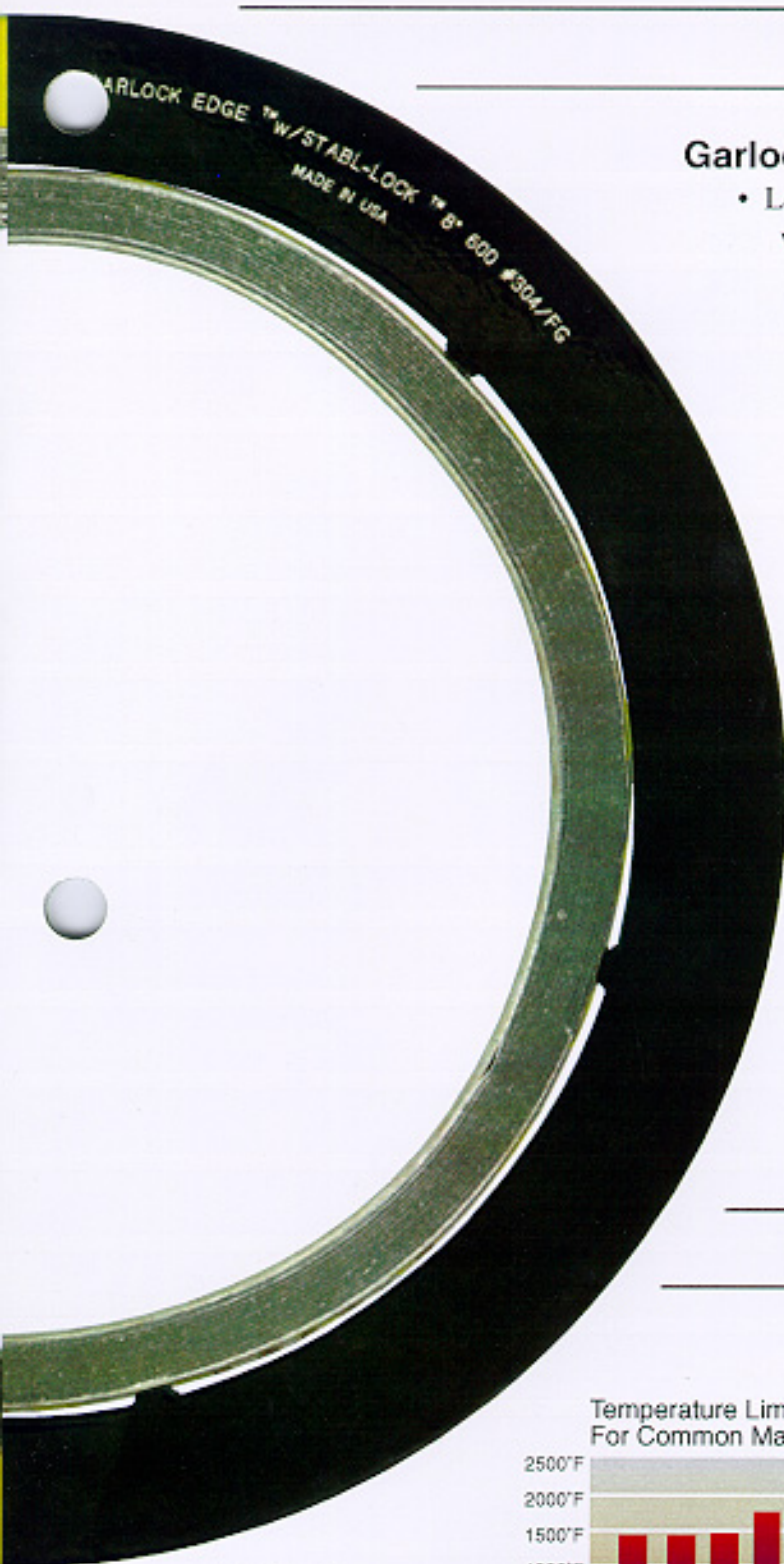

Garlock Controlled Density™ winding

- Lower compressive force required to obtain a seal when compared to standard spiral wound gaskets

STABL-LOCK™ inner wrap construction

- Prevents sealing element from flowing towards the process stream

Square cut retaining groove

- Holds winding firmly in place
- Maintains symmetrical cross section

Modified guide ring

- Insures guide ring contact with all raised face seating surfaces

Relief ports in the outer guide ring

- Controls sealing element flow


Available in Dual Flange design

- Reduces inventory


*Patent Pending

Full Range of Materials

Temperature Limits
For Common Materials

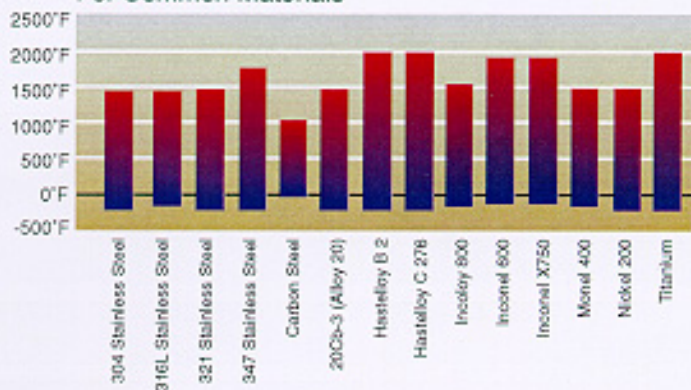


Temperature Limits
For Filler Materials

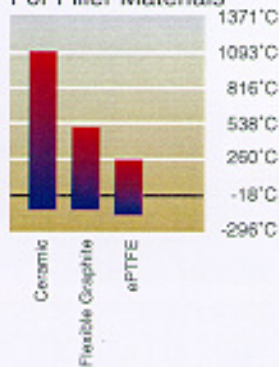


Garlock EDGE™

Dual Flange Design

- The dual flange option is designed to accommodate both 150 and 300 lb. pressure class flanges.
- Reduce your spiral wound gasket inventory!
- Specify the Garlock EDGE™ DF on your next order.

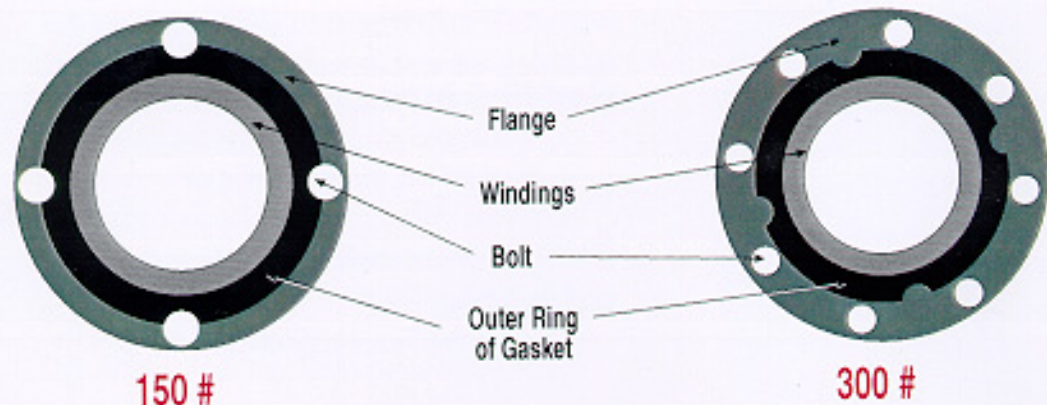

AUTHORIZED DISTRIBUTOR

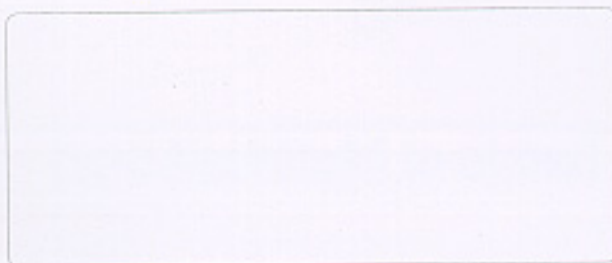

WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

GARLOCK is a registered trademark for packings, seals, gaskets, and other products of Garlock. © Garlock Inc 1998. All rights reserved worldwide.

Coltec Industries



Garlock Sealing Technologies
Metallic Gasket Division
1977 Kindred Street
Houston, TX 77049 USA
Phone: 1-281-459-7200
1-800-972-7638
Fax: 1-281-458-0502
1-800-363-5674

Visit our web site at:
www.garlock-inc.com

Other Garlock facilities are located in:

Palmyra, NY, USA	1-800-448-6688
Paragould, AR, USA	1-870-239-4051
Columbia, SC, USA	1-803-783-1880
Sydney, Australia	61-2-9597-4422
São Paulo, Brazil	55-11-884-9680
Oakville, Canada	1-905-829-3200
Berkshire, England	44-1635-38509
Saint-Étienne, France	33-4-7725-2277
Neuss, Germany	49-2131-3490
Seoul, Korea	822-554-6341
Mexico City, Mexico	52-5-567-7011
Singapore	65-284-7873

Garlock®

Sealing Technologies

Fax: 1-315-597-5556
Fax: 1-870-239-4054
Fax: 1-803-783-4279
Fax: 61-2-9597-7729
Fax: 55-11-884-9680
Fax: 1-905-829-3333
Fax: 44-1635-569573
Fax: 33-4-7737-1814
Fax: 49-2131-349-222
Fax: 822-554-6343
Fax: 52-5-368-0418
Fax: 65-284-6089

Printed on Recycled Paper



PRINTED IN U.S.A.

GMG 1:7

GPS-11/98-1M-B