

# THERMa-PUR™

## Style 4122 & 4122-FC

THERMa-PUR™ is a proprietary new gasketing material designed for use in high temperature sealing applications. It is produced using an environmentally friendly solvent-free process and combines a unique formulation with a patent-pending fiber core. THERMa-PUR™ is yet another innovative Garlock Sealing Technologies sealing solution that provides more than just temperature resistance.

### Value & Benefits

- **Extreme Temperature** Able to withstand high temperature, whether continuous or in thermal cycling conditions
- **Oxidation Resistance** Contains proprietary materials that provide improved weight loss characteristics over other high temperature solutions. (see graph)
- **Hydrophobic & Electrically Insulating** Resists water and provides electrical isolation thus reducing the possibility of corrosion between flanges made of dissimilar metals
- **Easy Release from Flanges** Does not stick to flanges making removal of gaskets easy and fast
- **Safer Handling** Patent-pending fiber core makes gaskets safer to handle when compared to traditional high temperature gaskets with steel cores

# Garlock

SEALING TECHNOLOGIES®

an EnPro Industries company

### Configurations

THERMa-PUR™ will be available in:



### Ideal for

- Marine and Land-based Exhaust Systems
- Biomass Gasification Process
- Oil and Gas Production
- Mineral and Fertilizer Processing
- Incineration Process
- Co-generation Systems
- Turbochargers Equipment
- Process Drying Equipment

# Typical Physical Properties


<b>Temperature</b>	Continuous max.	+1832°F (1000°C)
<b>Pressure</b> <sup>1</sup>	psig (bar)	4122-FC 4122-CMG 4122-KAMM
		500 (34.5) 1000 (68.9) Equal to flange rating
<b>P x T, max.</b> <sup>2</sup>	psig x °F (bar x °C)	4122-FC 4122-CMG 4122-KAMM
		150,000 (5,100) 600,000 (21,500) Equal to flange rating
<b>Typical Physical Properties for 4122-FC<sup>3</sup>:</b>		
<b>ASTM Test Method F36</b>		
	Compressibility, range, %	35-45
	Recovery %	18
<b>ASTM F38</b>		
	Creep Relaxation, %	25
<b>ASTM F152</b>		
	Tensile, w/insert, psi (N/mm <sup>2</sup> )	1,500 (10.34)
<b>ASTM F1315</b>		
	Density, lbs./ft <sup>3</sup> (grams/cm <sup>3</sup> )	95 (1.52)
<b>ASTM D149</b>		
	Dielectric Properties, volts/mil.	100

## Notes:

1. Based on ANSI RF flanges at our preferred torque. When approaching maximum pressure, continuous operating temperature, minimum temperature or 50% of maximum P x T, consult Garlock Engineering.

2. P x T = psig x °F (bar x °C)

<sup>3</sup> This is a general guide and should not be the sole means of selecting or rejecting this material. ASTM test results in accordance with ASTM F-104; properties based on 1/16" (1.6mm) gasket thickness unless otherwise mentioned.


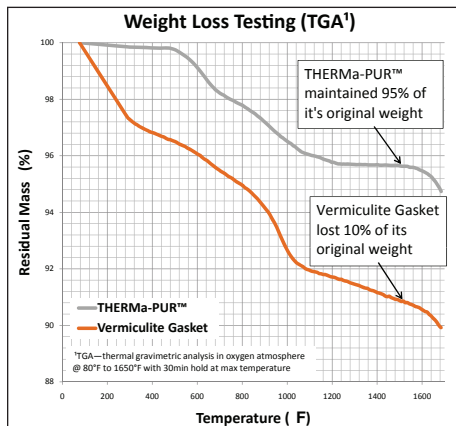


## Low Weight Loss

THERMa-PUR™ proprietary formulation resists oxidation and has improved weight loss property by almost 2X when compared to other high temp organic based gasket such as graphite and vermaculite

## Out Performs

THERMa-PUR™ out performed vermiculite based gaskets in laboratory testing<sup>†</sup>. THERMa-PUR™ showed significantly less leakage even in extreme thermal cycling condition <sup>†</sup>For test details, please contact Garlock Engineering

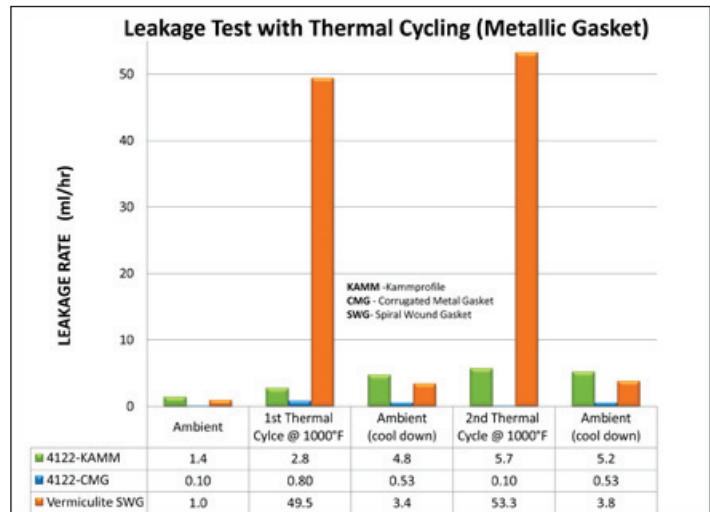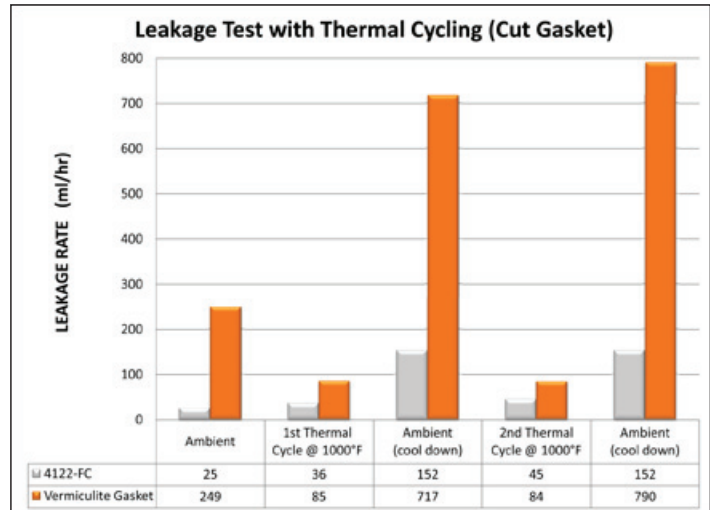

## AUTHORIZED REPRESENTATIVE

2008 RECIPIENT OF ENVIRONMENTAL PROTECTION AGENCY'S



## WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

Garlock Sealing Technologies, LLC is a registered trademark for packings, seals, gaskets, and other products of Garlock.

© Garlock Sealing Technologies, LLC 2011. All rights reserved worldwide.

**Garlock**  
SEALING TECHNOLOGIES®

an EnPro Industries company

**Garlock Sealing Technologies**  
1666 Division Street  
Palmyra, New York 14522 USA  
1-315-597-4811  
1-800-448-6688  
Fax: 1-800-543-0598  
1-315-597-3039

[www.garlock.com](http://www.garlock.com)

Other facilities within the Garlock family companies are located in:

<b>Columbia, SC, USA</b>	Phone 1.803.783.1880	Fax 1.803.783.4279
<b>Houston, TX, USA</b>	Phone 1.315.597.4811	Fax 1.315.597.3216
<b>Houston, TX, USA</b>	Phone 1.713.747.6948	Fax 1.713.747.6029
<b>Denver, CO, USA</b>	Phone 1.303.988.1242	Fax 1.303.988.1922
<b>Sydney, Australia</b>	Phone 61.2.9793.2511	Fax 61.2.9793.2544
<b>Auckland, New Zealand</b>	Phone 64.9573.5651	Fax 64.9573.5636
<b>São Paulo, Brazil</b>	Phone 55.11.4352.6161	Fax 55.11.4352.8181
<b>Sherbrooke, Canada</b>	Phone 1.819.563.8080	Fax 1.819.563.5620
<b>W. Yorkshire, England</b>	Phone 44.1422.313600	Fax 44.1422.313601
<b>Saint-Étienne, France</b>	Phone 33.4.7743.5100	Fax 33.4.7743.5151
<b>Neuss, Germany</b>	Phone 49.2131.3490	Fax 49.2131.349.222
<b>Mexico City, Mexico</b>	Phone 52.55.5078.4600	Fax 52.55.5368.0418
<b>Singapore</b>	Phone 65.6285.9322	Fax 65.6284.5843
<b>Shanghai, China</b>	Phone 86.021.64544412	Fax 86.021.34080906
<b>Dubai, UAE</b>	Phone 971.4.8833652	Fax 971.4.8833682
<b>Pune, India</b>	Phone 91.20.3061.6608	Fax: 91.20.3061.6699

GSK 3:78

VIA-07/2011