

Purge Valves

Applications


SUPERLOK purge valves are manual bleed, vent, or drain valves. One-quarter turn with a wrench from finger-tight obtains leak-tight closure on first makeup. Snugging with a wrench ensures closure to the rated pressure with subsequent makeups.

Features

- Compact for convenient installation.
- Excess liquid or gas in system lines is bled through the vent hole.
- Cap is crimped to valve body to prevent accidental disassembly.
- Variety of end connections available: Superlok compression, NPT, and ISO threads.

Caution

When installing a **SUPERLOK** purge valve, position the vent hole to direct system fluid away from operating personnel. Discharge direction changes when cap is turned. Always open purge valves slowly. These valves contain no packing, so some fluid weepage will occur when the valves are opened. Operating personnel must protect themselves from exposure to system fluids.

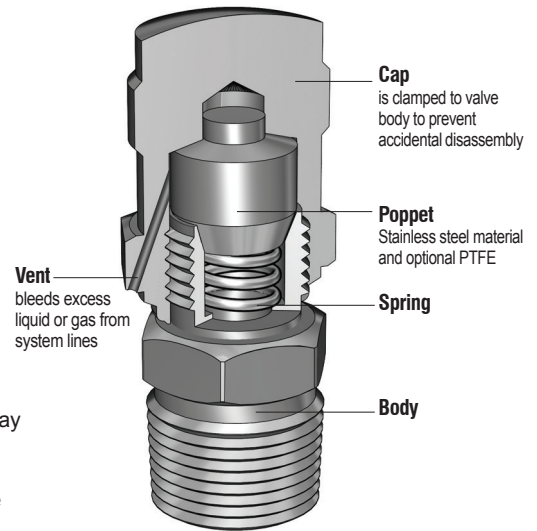

Materials of Construction

Component	Valve Body Materials
	Material Grade/ASTM Specification
Cap	316 SS / A276
Body	316 SS / A276
Poppet	316 SS / A276
Spring	304 SS


Technical Data

Series	Pressure - Temperature Rating	
	Temperature °F ()	Working Pressure psig (bar)
SPUV	-65 to 600°F (-54 to 315°C)	4,000psig (275bar) @100°F (38°C)

Pressure-Temperature Ratings

Material	316 SS
Temperature °F (°C)	Working Pressure, psig (bar)
-65(-53) to 100(37)	4,000(275)
150(65)	3,720(256)
200(93)	3,440(237)
300(148)	3,105(213)
350(176)	2,975(204)
400(204)	2,850(196)
450(232)	2,750(189)
500(260)	2,650(182)
600(315)	2,500(172)

Table of Dimensions

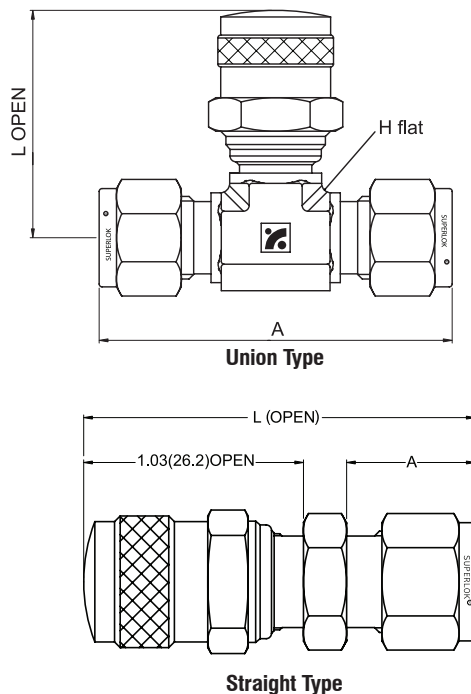

Union Type



Part Number	Inlet End Connection	Dimensions in.(mm)		
		L	A	H
SPUV	S4-UT 1/4" SUPERLOK	1.49(38.0)	2.26(57.5)	0.63(15.9)
	S6-UT 3/8" SUPERLOK	1.49(38.0)	2.40(61.0)	0.63(15.9)
	S8-UT 1/2" SUPERLOK	1.61(41.0)	2.82(71.6)	0.81(20.6)

Straight Type

Part Number	Inlet End Connection	Dimensions in.(mm)		
		L	H	
F2N	1/8" Female NPT	1.56 (39.6)	0.53 (13.5)	
F4N	1/4" Female NPT	1.75 (44.4)	0.72 (18.3)	
F6N	3/8" Female NPT	1.81 (46.0)	0.78 (19.8)	
F8N	1/2" Female NPT	1.98 (50.3)	0.97 (24.6)	
M2N	1/8" Male NPT	1.62 (41.1)	0.38 (9.7)	
M4N	1/4" Male NPT	1.81 (46.0)	0.56 (14.2)	
M6N	3/8" Male NPT	1.84 (46.7)	0.56 (14.2)	
M8N	1/2" Male NPT	2.09 (53.1)	0.75 (19.1)	
SPUV	S2	1/8" SUPERLOK	1.84 (46.7)	0.59 (15.0)
	S4	1/4" SUPERLOK	1.94 (49.3)	0.69 (17.5)
	S6	3/8" SUPERLOK	2.03 (51.6)	0.75 (19.1)
	S8	1/2" SUPERLOK	2.19 (55.6)	0.88 (22.4)
	S6M	6mm SUPERLOK	1.94 (49.3)	0.69 (17.5)
	S8M	8mm SUPERLOK	2.00 (50.8)	0.72 (18.3)

Dimensions are for reference only, subject to change.

Table of Dimensions

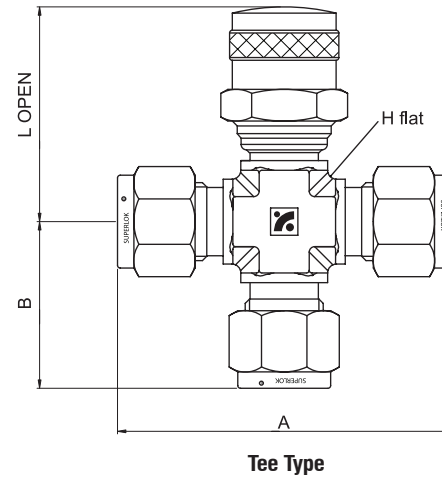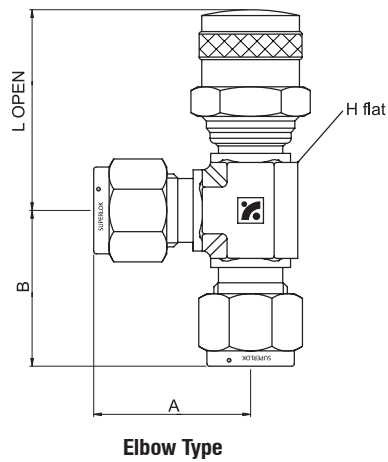

Part Number	Inlet End Connection	Dimensions in.(mm)			
		L	A	B	H
SPUV	S4-ET	1.49 (38.0)	1.13 (28.8)	1.13 (28.8)	0.63 (15.9)
	S6-ET	1.49 (38.0)	1.20 (30.5)	1.20 (30.5)	0.63 (15.9)
	S8-ET	1.61 (41.0)	1.41 (35.8)	1.41 (35.8)	0.81 (20.6)

Part Number	Inlet End Connection	Dimensions in.(mm)			
		L	A	B	H
SPUV	S4-TT	1.49 (38.0)	2.26 (57.5)	1.13 (28.8)	0.63 (15.9)
	S6-TT	1.49 (38.0)	2.40 (61.0)	1.20 (30.5)	0.63 (15.9)
	S8-TT	1.61 (41.0)	2.82 (71.6)	1.41 (35.8)	0.81 (20.6)

- All dimensions in milli meters unless specified as "inch". Dimension are for reference only, subject to change.
- Superlok ends are measured with the nuts finger tight.

Ordering Information

Example : **SPUV - S 4 - UT - SS**

1
2
3
4
5

1. Valve Series

SPUV

2. End Connection

S : SUPERLOK Tube Fitting

F : Female Thread

M : Male Thread

3. End Connection Size

Tube O.D Designation

Tube O.D (inch)	1/4	3/8	1/2
Designation	4	6	8
Tube O.D (mm)	6	10	12
Designation	6M	10M	12M

Pipe Thread Designation

Size (inch)	1/8	1/4	3/8	1/2
BSPT	2R	4R	6R	8R
NPT	2N	4N	6N	8N

4. Pattern Designator

Nil : Straight Type

UT : Union Type

ET : Elbow Type

TT : Tee Type

5. Body Material

SS : 316 Stainless Steel

B : Brass