


Thomson MOTION PAC X

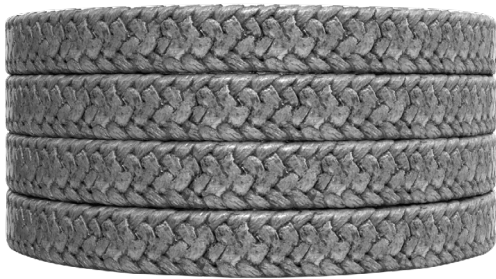

Carbon fiber c/w Aflas® resilient elastomer core.

Excellent choice for side, bottom and top entry agitators/mixers.

FEATURES / BENEFITS

- Oversize square braid design ensures tighter seals in worn or oversized stuffing boxes.
- Carbon/Aflas® maximizes reliability and stability in equipment.
- Provides excellent chemical resistance.
- Carbon filament reinforcement resists extrusion in high-pressure applications.
- Spool stock convenience.
- Maintains an effective seal in a high radial run out or bent shaft conditions (e.g. side entry agitators/mixers).

TYPICAL APPLICATIONS

- Most rotary applications
- Agitators/mixers
- Re-pulpers
- Thomson Sealing System FLOW PRO™ bushing, compression packing sealings rings.

SPECIFICATIONS

Construction:

High purity carbon yarn c/w Aflas® elastomeric resilient core. Braid over core.

Max Speed:

To 3600 fpm (18.2 m/s)

Temperatures:

-30°F (-34°C) to
400°F (204°C)

Max Pressure:

500 psi (35 bar) rotary
centrifugal pumps
2500 psi (172 bar) valves

pH range:

0–14 (except
strong oxidizers)

Aflas® is a registered trademark of the Asahi Glass Co., Ltd. All trademarks remain property of their respective holders and are used only to directly describe the products being provided.

ORDERING INFORMATION - MOTION PAC X

Specify Thomson style, size and quantity (lbs) required.

Size	3/8"	1/2"	5/8"	3/4"	7/8"	1"
Approx. (ft/lb)	12	8.7	5.7	4	2.5	2
Std pkg (lbs)	5	5/25	5/25	5/25	10/25	10/5

Also available in metric sizes, die formed pre-packaged sets, and specialty cut lengths.
Contact A.R. Thomson Group for any special requirements.

SHAFT SPEED CONVERSION CALCULATIONS

Feet per minute (fpm)	Meter per second (m/s)
Shaft / sleeve diameter (in) x RPM x 0.262 = fpm	Shaft / sleeve diameter (in) x RPM x 0.0013299 = m/s
Shaft / sleeve diameter (mm) x RPM x 0.0103 = fpm	Shaft / sleeve diameter (mm) x RPM x 0.0000524 = m/s

AUTHORIZED DISTRIBUTOR



Limitation of liability: actual performance may vary and is determined by factors unique to a given application. It is recommended that care be taken in the selection and application of materials for hazardous services and controlled testing be undertaken to determine suitability for a specific application. A.R. Thomson Group does not make or imply any warranty of suitability for a particular purpose and is not liable for any damages arising from the use of the information in this sheet.

 **A.R. THOMSON GROUP INC.**

Locations across Canada to serve you. For your nearest branch, please visit: www.arthomson.com

Copyright © A.R. Thomson Group - All rights reserved.

arthomson.com