


Flowmeter MODEL ESF

Save resources and extend seal life

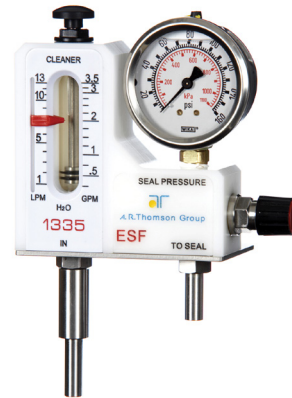

Model ESF sealing liquid monitor is designed for applications where uninterrupted seal water flow is required. Adequate seal water flow for cooling and lubrication result in water savings, energy savings, reduced maintenance, and extended life of seals. The Thomson ESF single flow meter is an excellent choice for all styles of compression packing, single mechanical seals, FLOW PRO™ sealing systems - for applications where gland water reduction and minimizing product dilution is essential. The sturdy modular construction and many accessories make it very flexible.

FEATURES / BENEFITS

- Reliable operation.
- Solid construction.
- Excellent corrosion and heat resistance.
- Detachable metering scale.
- Built-in pressurizing valve.
- Alarm-ready.
- Clog resistant flow control valve.
- 3 connector options.
- Mounting bracket.
- Built-in tube cleaner.
- PSU (polysulphone) tube - freeze resistant.

TYPICAL APPLICATIONS

FLOW PRO™ sealing system
Single mechanical seals
Gland packings

OPTIONS

Glass Tube
Inductive adjustable alarm
Pressure gauge
Floor mounting stand
Hose barb connectors, straight tube connectors for compression fittings or 3/8" compression fittings
Pressurizing valve

SPECIFICATIONS

Body: Standard Delrin (POM) or Kynar (PVDF)

Metering Tube: Polysulphone (PSU)

*standard material - freeze resistant

Metallic Parts: AISI 316 and AISI 304

Seals: Viton® o-rings

Pressure, Max: 435 psi at 120°F

Temperature, Max:


POM body / PSU tube: 212°F (100°C)

Kynar body / PSU tube: 266°F (130°C)

Connection: Standard 3/8" OD stainless straight tube

Weight: 3.5 lbs / 2.3 kg c/w pressure gauge, pressurizing valve, and packaging

STANDARD ESF SINGLE MODEL - PART # ESF-1335-PSE-XXX

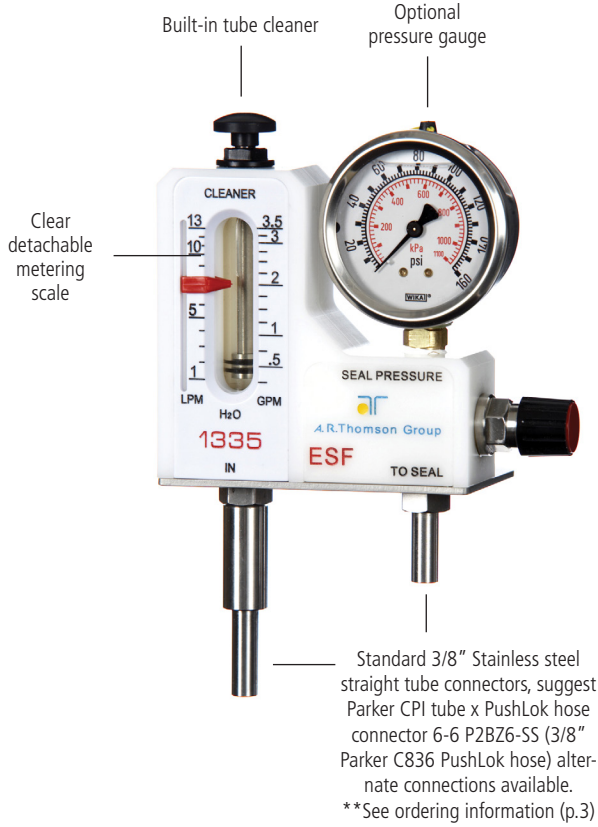

AUTHORIZED DISTRIBUTOR

Limitation of liability: actual performance may vary and is determined by factors unique to a given application. It is recommended that care be taken in the selection and application of materials for hazardous services and controlled testing be undertaken to determine suitability for a specific application. A.R. Thomson Group does not make or imply any warranty of suitability for a particular purpose and is not liable for any damages arising from the use of the information in this sheet.



Locations across Canada to serve you. For your nearest branch, please visit www.arthomson.com Copyright © A.R. Thomson Group - All rights reserved. PAGE 2 OF 3

STANDARD ESF DUAL MODEL - PART # ESF-1335-PSE-XXX - ORDER FORM

ESF								SINGLE FLOW MONITOR	
	350							3 LPM	50 USGPH
	120							1 LPM	20 USGPH
	1335							13 LPM	3.5 USGPM
	82							8 LPM	2 USGPM

BODY MATERIAL

P								Delrin (POM) STANDARD
K								Kynar

CONNECTION TYPE

H								3/8" ID Hosebarb
S								3/8" OD Straight Tube
T								3/8" Compression Fitting (C/W Nut and 2 Ferrules)

PRESSURE GAUGE

A								15 psi
B								30 psi
C								60 psi
D								100 psi
E								160 psi
F								200 psi
G								300 psi
H								400 psi
I								100 psi with red set pointer
J								160 psi with red set pointer
K								200 psi with red set pointer
L								300 psi with red set pointer
M								400 psi with red set pointer

OPTIONS

P								Pressuring valve (for double seal with ESF Model)
	S							Stand
		A						Alarm 10–55 VDC 150 mA (IG 5919)
		B						Alarm 20–250 VAC/DC 300 mA (IG 0374)

